

# TAPIFLEX & ACCZENT EXCELLENCE



## TAPIFLEX & ACCZENT EXCELLENCE

The inspirational collection to create stimulating environments in very heavy traffic areas in education, aged care, healthcare & offices.

### SENSORIAL BENEFITS


- 117 all-over colours and wood decors adapted to age and setting
- Endless possibilities to create inspiring interiors and to mix and match decors
- All-inclusive solution fully integrated with coordinated wall, stairs, and accessories options
- Multicolour welding rods available for wood designs

### FUNCTIONAL BENEFITS

- All colors available in compact and acoustic
- Accent Unik loose-lay option
- Great acoustical comfort with no compromise on indentation
- Money and time savings with easy maintenance
- No wax no polish for life with TopClean XP™


### ENVIRONMENTAL BENEFITS

- Healthy option with excellent indoor air quality
- Favoured well-being with less in-room noise and increased walking comfort
- Eco-designed to save resources on the long term

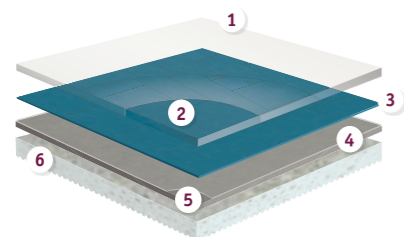


### ACOUSTIC OPTION TAPIFLEX EXCELLENCE

- 1 TopClean XP™ PUR reinforcement: very high resistance to scratches and easy maintenance
- 2 Pure PVC transparent wear layer: resistance to abrasion
- 3 High definition print: for perfect designs
- 4 Glass fibre non-woven reinforcement: superior dimensional stability
- 5 Solid homogeneous calendered sheet made of recycled vinyl: resistance to indentation and tearing
- 6 High density closed-cell foam backing: sound reduction and comfort underfoot

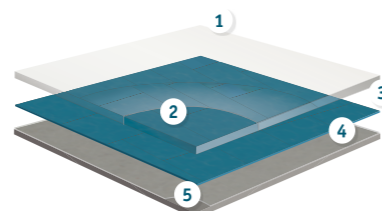

### COMPACT OPTION ACCZENT EXCELLENCE

- 1 TopClean XP™ PUR reinforcement: very high resistance to scratches and easy maintenance
- 2 Pure PVC transparent wear layer: resistance to abrasion
- 3 High definition print: for perfect designs

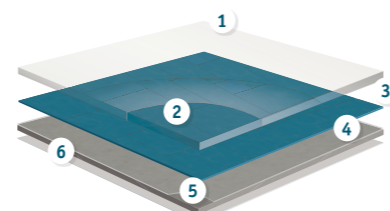

### COMPACT LOOSE-LAY OPTION ACCZENT UNIK

- 4 Glass fibre non-woven reinforcement: superior dimensional stability (< 0.10%)
- 5 Solid homogeneous calendered sheet made of recycled vinyl: resistance to indentation and tearing
- 6 Polyester backing

### ACOUSTIC OPTION TAPIFLEX EXCELLENCE

TECHNICAL DATA	STANDARDS	Tapiflex Excellence 65 sheet	Tapiflex Tiles 65
Classification		Heterogeneous Acoustic Vinyl	
Type of Floor Covering	ISO 11638 / EN 651		
Classification	ISO 10874 commercial	Class: 34	
Characteristics			
Total thickness	ISO 24346	3.05mm	3.45mm
Wear layer thickness	ISO 24340	0.65mm	
Total weight	ISO 23997	2 850g/m <sup>2</sup>	3 410g/m <sup>2</sup>
PU treatment	-	TopClean XP™	
Wear layer binder content	ISO 10582	Type I	
Technical performances			
Impact sound reduction	EN ISO 10140-3 EN ISO 717/2	ΔL <sub>w</sub> = 19dB	
Acoustic improvement	NF 531-074	L <sub>n,e,w</sub> < 65dB Class A	
Residual indentation	Average measured value	0.10mm	0.12mm
	ISO 24343-1 requirement	≤ 0.20mm	
	Best measured value(*)	0.08mm	0.10mm
Reaction to fire	EN 13501-1	B <sub>n</sub> s1 on fibre cement substrate A2 <sub>n</sub> - C <sub>n</sub> on woodchip substrate ≥ 19 mm	
Slip resistance	DIN 51130 EN 13893	R9 - R10 (Wood) μ ≥ 0.30	
Dimensional stability	ISO 23999	≤ 0.10%	
Furniture leg	EN 424	No damage	
Castor wheel test	ISO 4918	No damage	
Curl resultant to heat	ISO 23999	≤ 8mm	≤ 2mm
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 <sup>9</sup> ohms	
Chemical resistance	ISO 26987	High resistance	
Hygiene	-	Does not contribute to infection spreading	
Thermal resistance Underfloor heating	EN ISO 10456	0.04m <sup>2</sup> K/W Suitable	
Light fastness	EN ISO 105-B02	≥ 6	≥ 6/8
Form of delivery	ISO 24341	approx. 23 running metres x 200 cm	-
	ISO 24342	-	50 x50 cm - 20 titles/box = 5.00 m <sup>2</sup>
Colours		117	10

(\*) for information - not binding

### COMPACT OPTION ACCZENT EXCELLENCE

TECHNICAL DATA	STANDARDS	Accent Excellence 80	Accent Unik Loose-Lay
Classification		Heterogeneous Compact Vinyl	
Type of Floor Covering	ISO 10582		
Classification	ISO 10874 commercial industrial	Classes: 34 43	Classes: 32 -
Characteristics			
Total thickness	ISO 24346	2.00mm	2.10mm
Wear layer thickness	ISO 24340	0.80mm	
Total weight	ISO 23997	3 100g/m <sup>2</sup>	3 140g/m <sup>2</sup>
PU treatment	-	TopClean XP™	
Wear layer binder content	ISO 10582	Type I	
Technical performances			
Residual indentation	Average measured value	0.03mm	
	ISO 24343-1 requirement	≤ 0.10mm	
Reaction to fire	EN 13501-1	B <sub>n</sub> s1 on fibre cement substrate A2 <sub>n</sub> B <sub>n</sub> s1 on woodchip substrate ≥ 19 mm	B <sub>n</sub> s1 loose-laid over any A2 <sub>n</sub> or A1 <sub>n</sub> substrate with density ≥ 1200 kg/m <sup>3</sup> (on cement) B <sub>n</sub> s1 loose-laid over any derivative wood substrate with density ≥ 470 kg/m <sup>3</sup>
Slip resistance	DIN 51130 EN 13893	R9 - R10 (Wood) μ ≥ 0.30	
Dimensional stability	ISO 23999	≤ 0.10%	
Furniture leg	EN 424	No damage	
Castor wheel test	ISO 4918	No damage	
Curl resultant to heat	ISO 23999	≤ 8mm	
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 <sup>9</sup> ohms	≤ 2kV on concrete R1 > 10 <sup>9</sup> ohms
Chemical resistance	ISO 26987	High resistance	
Hygiene	-	Does not contribute to infection spreading	
Thermal resistance Underfloor heating	EN ISO 10456	0.02m <sup>2</sup> K/W Suitable	
Light fastness	EN ISO 105-B02	≥ 6	
Form of delivery	EN 24341	approx. 23 running metres x 200 cm	approx. 23 running metres x 200 cm Floating standard: 10>23 lm
Colours		117	6




The above information is subject to modifications for the benefit of further improvement (07/2016). For more detailed technical information, please contact Tarkett.

# TAPIFLEX & ACCZENT EXCELLENCE



Long Modern Oak - Black

## Long Modern Oak

				
White	Black	Natural	Natural Brown	Brown
Acoustic: 25018 005 Compact: 25029 005	Acoustic: 25018 006 Compact: 25029 006	Acoustic: 25018 010 Compact: 25029 010	Acoustic: 25018 009 Compact: 25029 009	Acoustic: 25018 007 Compact: 25029 007






## Saw Oak

				
Beige	Natural	Black	Light	Dark
Acoustic: 25018 014 Compact: 25029 014	Acoustic: 25018 015 Compact: 25029 015	Acoustic: 25018 016 Compact: 25029 016	Acoustic: 25018 003 Compact: 25029 003	Acoustic: 25018 004 Compact: 25029 004

## Vintage Pine

## Farmhouse

			
Warm Grey	Light Beige	Natural	Grege
Acoustic: 25018 000 Compact: 25029 000	Acoustic: 25018 002 Compact: 25029 002	Acoustic: 25018 001 Compact: 25029 001	Acoustic: 25018 008 Compact: 25029 008

## Long Modern Oak

## All-Over Wood

		
Grege	Brown	Black
Acoustic: 25018 011 Compact: 25029 011	Acoustic: 25018 012 Compact: 25029 012	Acoustic: 25018 013 Compact: 25029 013

## ACOUSTIC OPTION TAPIFLEX EXCELLENCE

TECHNICAL DATA	STANDARDS	Tapiflex Excellence 65 sheet
<b>Classification</b>		
Type of Floor Covering	ISO 11638 / EN 651	Heterogeneous Acoustic Vinyl
Classification	ISO 10874 commercial	Class: 34
<b>Characteristics</b>		
Total thickness	ISO 24346	3.05mm
Wear layer thickness	ISO 24340	0.65mm
Total weight	ISO 23997	2 850g/m <sup>2</sup>
PU treatment	-	TopClean XP™
Wear layer binder content	ISO 10582	Type I
<b>Technical performances</b>		
Impact sound reduction	EN ISO 10140-3 EN ISO 717/2	ΔL <sub>w</sub> = 19dB
Acoustic improvement	NF S31-074	L <sub>n,w</sub> < 65dB Class A
Residual indentation	Average measured value	0.10mm
	ISO 24343-1 requirement	≤ 0.20mm
	Best measured value(*)	0.08mm
Reaction to fire	EN 13501-1	B <sub>s1</sub> s1 on fibrecement substrate A2 <sub>fl</sub> C <sub>fl</sub> on woodchip substrate ≥ 19 mm
Slip resistance	DIN 51130 EN 13893	R10 μ ≥ 0.30
Dimensional stability	ISO 23999	≤ 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918	No damage
Curl resultant to heat	ISO 23999	≤ 8mm
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 <sup>9</sup> ohms
Chemical resistance	ISO 26987	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.04m <sup>2</sup> K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6

(\*) for information - not binding

## COMPACT OPTION ACCZENT EXCELLENCE

TECHNICAL DATA	STANDARDS	Accent Excellence 80
<b>Classification</b>		
Type of Floor Covering	ISO 10582	Heterogeneous Compact Vinyl
Classification	ISO 10874 commercial industrial	Classes: 34 43
<b>Characteristics</b>		
Total thickness	ISO 24346	2.00mm
Wear layer thickness	ISO 24340	0.80mm
Total weight	ISO 23997	3 100g/m <sup>2</sup>
PU treatment	-	TopClean XP™
Wear layer binder content	ISO 10582	Type I
<b>Technical performances</b>		
Residual indentation	Average measured value	0.03mm
	ISO 24343-1 requirement	≤ 0.10mm
Reaction to fire	EN 13501-1	B <sub>s1</sub> s1 on fibrecement substrate A2 <sub>fl</sub> B <sub>s1</sub> s1 on woodchip substrate ≥ 19 mm
Slip resistance	DIN 51130 EN 13893	R10 μ ≥ 0.30
Dimensional stability	ISO 23999	≤ 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918	No damage
Curl resultant to heat	ISO 23999	≤ 8mm
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 <sup>9</sup> ohms
Chemical resistance	ISO 26987	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.02m <sup>2</sup> K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6

The above information is subject to modifications for the benefit of further improvement (07/2016). For more detailed technical information, please contact Tarkett.

## TAPIFLEX & ACCZENT EXCELLENCE

### Woods

### Main Product Features

- Unique long planks to enhance spaces
- Authentic feeling with new matt finish and realistic surface aspect
- Excellent resistance with TopClean XP™ surface treatment
- Multi-colour welding rods

### Surface Treatment



### Sustainability Tag

#### Tapiflex Excellence 65


100% Recyclable Recycled content 21%	PHthalate FREE Technology *except recycled content	Optimal Indoor Air Quality < 10 µg/m <sup>3</sup> *TVOC AT 28 DAYS	Restart Ready
---	---	--	---------------

#### Acczent Excellence 80

100% Recyclable Recycled content 33%	PHthalate FREE Technology *except recycled content	Optimal Indoor Air Quality < 10 µg/m <sup>3</sup> *TVOC AT 28 DAYS	Restart Ready
---	---	--	---------------

### Logistics Information

Available in rolls  
Rolls length: 231m

Laying direction:   
Wood

### General Information

 Tapiflex Excellence 65 Sheet 0120-05600P-2014-05 http://professionals.tarkett.com Manufactured by: Tarkett SAS 08200 Sedan - FRANCE EN 14041:2004	 According to European Classification ISO 10874 (EN 685)
 Acczent Excellence 80 0120-00400P-2013-04 http://professionals.tarkett.com Manufactured by: Tarkett SAS 08200 Sedan - FRANCE EN 14041:2004	 According to European Classification ISO 10874 (EN 685)


# TAPIFLEX & ACCZENT EXCELLENCE



All-over Wood - Black




## Strip Oak



Natural


Acoustic: 25019 006  
Compact: 25030 006



Brown


Acoustic: 25019 004  
Compact: 25030 004

## Walnut



Natural


Acoustic: 25019 007  
Compact: 25030 007



Dark

Acoustic: 25019 008  
Compact: 25030 008

## Cabreuva



Red

Acoustic: 25019 000  
Compact: 25030 000



Brown

Acoustic: 25019 003  
Compact: 25030 003

## Washed Oak



White

Acoustic: 25019 017  
Compact: 25030 017  
Unik: 3778 017\*



Natural

Acoustic: 25019 018  
Compact: 25030 018

## Oak



Light

Acoustic: 25019 001  
Compact: 25030 001  
Unik: 3778 001\*

## Brushed Oak



Light

Acoustic: 25019 027  
Compact: 25030 027



Medium

Acoustic: 25019 026  
Compact: 25030 026

## Beech



Light

Acoustic: 25019 002  
Compact: 25030 002

## Maple



Maple

Acoustic: 25019 005  
Compact: 25030 005

## ACOUSTIC OPTION TAPIFLEX EXCELLENCE

TECHNICAL DATA	STANDARDS	Tapiflex Excellence 65 sheet
<b>Classification</b>		
Type of Floor Covering	ISO 11638 / EN 651	Heterogeneous Acoustic Vinyl
Classification	ISO 10874 commercial	Class: 34
<b>Characteristics</b>		
Total thickness	ISO 24346	3.05mm
Wear layer thickness	ISO 24340	0.65mm
Total weight	ISO 23997	2 850g/m <sup>2</sup>
PU treatment	-	TopClean XP™
Wear layer binder content	ISO 10582	Type I
<b>Technical performances</b>		
Impact sound reduction	EN ISO 10140-3 EN ISO 717/2	$\Delta L_w = 19dB$
Acoustic improvement	NF S31-074	$L_{n,w} < 65dB$ Class A
Residual indentation	Average measured value	0.10mm
	ISO 24343-1 requirement	$\leq 0.20mm$
	Best measured value(*)	0.08mm
Reaction to fire	EN 13501-1	B <sub>s1</sub> s1 on fibre cement substrate A2 <sub>s1</sub> C <sub>s1</sub> on woodchip substrate $\geq 19$ mm
Slip resistance	DIN 51130 EN 13893	R9 $\mu \geq 0.30$
Dimensional stability	ISO 23999	$\leq 0.10\%$
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918	No damage
Curl resultant to heat	ISO 23999	$\leq 8mm$
Electrostatic properties	EN 1815 EN 1081	$\leq 2kV$ on concrete R1 > 10 <sup>9</sup> ohms
Chemical resistance	ISO 26987	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.04m <sup>2</sup> K/W Suitable
Light fastness	EN ISO 105-B02	$\geq 6$

(\*) for information – not binding

## COMPACT OPTION ACCZENT EXCELLENCE

TECHNICAL DATA	STANDARDS	Accent Excellence 80	Accent Unik Loose-Lay
<b>Classification</b>			
Type of Floor Covering	ISO 10582	Heterogeneous Compact Vinyl	
Classification	ISO 10874 commercial industrial	Classes: 34 43	Classes: 32 -
<b>Characteristics</b>			
Total thickness	ISO 24346	2.00mm	2.10mm
Wear layer thickness	ISO 24340	0.80mm	
Total weight	ISO 23997	3 100g/m <sup>2</sup>	3 140g/m <sup>2</sup>
PU treatment	-	TopClean XP™	
Wear layer binder content	ISO 10582	Type I	
<b>Technical performances</b>			
Residual indentation	Average measured value	0.03mm	
	ISO 24343-1 requirement	$\leq 0.10mm$	
Reaction to fire	EN 13501-1	B <sub>s1</sub> s1 on fibre cement substrate A2 <sub>s1</sub> B <sub>s1</sub> s1 on woodchip substrate $\geq 19$ mm	B <sub>s1</sub> s1 loose-laid over any A2 <sub>s1</sub> or A1 <sub>s1</sub> substrate with density $\geq 1200$ kg/m <sup>3</sup> (on cement) B <sub>s1</sub> s1 loose-laid over any derivative wood substrate with density $\geq 470$ kg/m <sup>3</sup>
Slip resistance	DIN 51130 EN 13893	R9 $\mu \geq 0.30$	
Dimensional stability	ISO 23999	$\leq 0.10\%$	
Furniture leg	EN 424	No damage	
Castor wheel test	ISO 4918	No damage	
Curl resultant to heat	ISO 23999	$\leq 8mm$	
Electrostatic properties	EN 1815 EN 1081	$\leq 2kV$ on concrete R1 > 10 <sup>9</sup> ohms	$\leq 2kV$ on concrete R1 > 10 <sup>9</sup> ohms
Chemical resistance	ISO 26987	High resistance	
Hygiene	-	Does not contribute to infection spreading	
Thermal resistance Underfloor heating	EN ISO 10456	0.02m <sup>2</sup> K/W Suitable	
Light fastness	EN ISO 105-B02	$\geq 6$	

The above information is subject to modifications for the benefit of further improvement (07/2016). For more detailed technical information, please contact Tarkett.

## TAPIFLEX & ACCZENT EXCELLENCE Woods

### Main Product Features

- Authentic feeling with new matt finish and realistic surface aspect
- New Acczent Unik loose-lay option\*\*
- Excellent resistance with TopClean XP™ surface treatment
- Multi-colour welding rods

### Surface Treatment



### Sustainability Tag

#### Tapiflex Excellence 65



#### Acczent Excellence 80



#### Acczent Unik Loose-Lay




### Logistics Information

Available in rolls  
Rolls length: 231m

Laying direction: Wood

### General Information

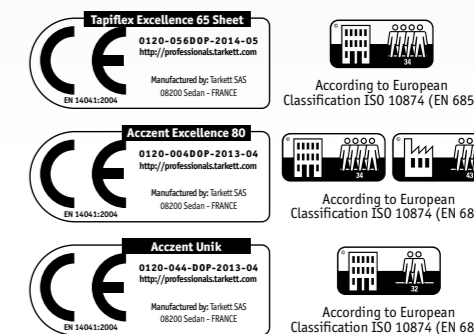

\*\* available on a selection of colours


# TAPIFLEX & ACCZENT EXCELLENCE



Ferum - Steel Blue, Concrete - Chalk



## Ferum



Acoustic: 25014 003  
Compact: 25026 003



Acoustic: 25014 002  
Compact: 25026 002  
Acoustic: 25055 002




Acoustic: 25014 000  
Compact: 25026 000



Acoustic: 25014 001  
Compact: 25026 001  
Acoustic: 25055 001


## Concrete



Acoustic: 25011 002  
Compact: 25025 002  
Unik: 25070 002\*



Acoustic: 25011 003  
Compact: 25025 003  
Unik: 25070 003\*



Acoustic: 25011 005  
Compact: 25025 005



Acoustic: 25011 000  
Compact: 25025 000  
Unik: 25070 000\*



Acoustic: 25011 004  
Compact: 25025 004



Acoustic: 25011 001  
Compact: 25025 001


## Esquisse



Acoustic: 25012 012  
Compact: 3751 012  
Acoustic: 4502 012




Acoustic: 25012 013  
Compact: 3751 013  
Acoustic: 4502 013



Acoustic: 25012 014  
Compact: 3751 014  
Unik: 25071 014\*  
Acoustic: 4502 014



Acoustic: 25012 017  
Compact: 3751 017



Acoustic: 25012 015  
Compact: 3751 015  
Acoustic: 4502 015



Acoustic: 25020 501  
Compact: 3764 001

## ACOUSTIC OPTION TAPIFLEX EXCELLENCE

TECHNICAL DATA	STANDARDS	Tapiflex Excellence 65 sheet	Tapiflex Tiles 65
<b>Classification</b>			
Type of Floor Covering	ISO 11638 / EN 651	Heterogeneous Acoustic Vinyl	
Classification	ISO 10874 commercial	Class: 34	
<b>Characteristics</b>			
Total thickness	ISO 24346	3.05mm	3.45mm
Wear layer thickness	ISO 24340	0.65mm	
Total weight	ISO 23997	2 850g/m <sup>2</sup>	3 410g/m <sup>2</sup>
PU treatment	-	TopClean XP™	
Wear layer binder content	ISO 10582	Type I	
<b>Technical performances</b>			
Impact sound reduction	EN ISO 10140-3 EN ISO 717/2	ΔL <sub>w</sub> = 19dB	
Acoustic improvement	NF 531-074	L <sub>n,RA</sub> < 65dB Class A	
Residual indentation	Average measured value	0.10mm	0.12mm
	ISO 24343-1 requirement	≤ 0.20mm	
	Best measured value(*)	0.08mm	0.10mm
Reaction to fire	EN 13501-1	B <sub>s</sub> s1 on fibrecement substrate A2 <sub>s</sub> C <sub>n</sub> on woodchip substrate ≥ 19 mm	B <sub>s</sub> s1 on fibrecement substrate A2 <sub>s</sub> C <sub>n</sub> on woodchip substrate ≥ 19 mm
Slip resistance	DIN 51130 EN 13893	R9 μ ≥ 0.30	
Dimensional stability	ISO 23999	≤ 0.10%	
Furniture leg	EN 424	No damage	
Castor wheel test	ISO 4918	No damage	
Curl resultant to heat	ISO 23999	≤ 8mm	≤ 2mm
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 <sup>9</sup> ohms	
Chemical resistance	ISO 26987	High resistance	
Hygiene	-	Does not contribute to infection spreading	
Thermal resistance Underfloor heating	EN ISO 10456	0.04m <sup>2</sup> K/W Suitable	
Light fastness	EN ISO 105-B02	≥ 6	≥ 6/8

(\*) for information - not binding

## COMPACT OPTION ACCZENT EXCELLENCE

TECHNICAL DATA	STANDARDS	Acczent Excellence 80	Acczent Unik Loose-Lay
<b>Classification</b>			
Type of Floor Covering	ISO 10582	Heterogeneous Compact Vinyl	
Classification	ISO 10874 commercial industrial	Classes: 34 43	Classes: 32 -
<b>Characteristics</b>			
Total thickness	ISO 24346	2.00mm	2.10mm
Wear layer thickness	ISO 24340	0.80mm	
Total weight	ISO 23997	3 100g/m <sup>2</sup>	3 140g/m <sup>2</sup>
PU treatment	-	TopClean XP™	
Wear layer binder content	ISO 10582	Type I	
<b>Technical performances</b>			
Residual indentation	Average measured value	0.03mm	
	ISO 24343-1 requirement	≤ 0.10mm	
Reaction to fire	EN 13501-1	B <sub>s</sub> s1 on fibrecement substrate A2 <sub>s</sub> B <sub>s</sub> s1 on woodchip substrate ≥ 19 mm	B <sub>s</sub> s1 loose-laid over any A2 <sub>s</sub> or A1 <sub>s</sub> substrate with density ≥ 1200 kg/m <sup>3</sup> (on cement) B <sub>s</sub> s1 loose-laid over any derivative wood substrate with density ≥ 470 kg/m <sup>3</sup>
Slip resistance	DIN 51130 EN 13893	R9 μ ≥ 0.30	
Dimensional stability	ISO 23999	≤ 0.10%	
Furniture leg	EN 424	No damage	
Castor wheel test	ISO 4918	No damage	
Curl resultant to heat	ISO 23999	≤ 8mm	≤ 8mm
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 <sup>9</sup> ohms	≤ 2kV on concrete R1 > 10 <sup>9</sup> ohms
Chemical resistance	ISO 26987	High resistance	
Hygiene	-	Does not contribute to infection spreading	
Thermal resistance Underfloor heating	EN ISO 10456	0.02m <sup>2</sup> K/W Suitable	
Light fastness	EN ISO 105-B02	≥ 6	

The above information is subject to modifications for the benefit of further improvement (07/2016). For more detailed technical information, please contact Tarkett.

## TAPIFLEX & ACCZENT EXCELLENCE

Ferum/Concrete/Esquisse

### Main Product Features

- All decors available in compact & acoustic 19dB
- Tiles format\*\*
- New Acczent Unik loose-lay option\*\*
- Excellent resistance with TopClean XP™ surface treatment

### Surface Treatment



### Sustainability Tag

#### Tapiflex Excellence 65



#### Tapiflex Tiles 65



#### Acczent Excellence 80



#### Acczent Unik Loose-Lay



### Logistics Information


Available in rolls  
Rolls length: 231m

Laying direction: ↓↑

Available in tiles

Laying direction: ↑↓

### General Information

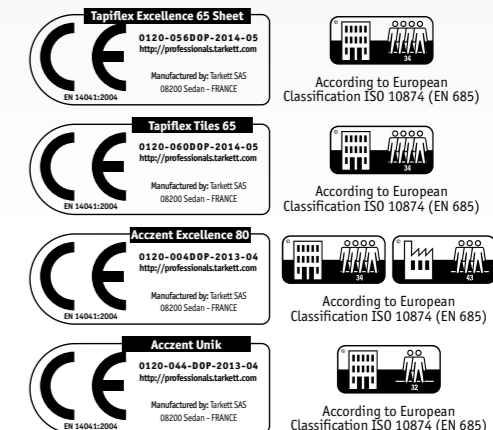

\*\* available on a selection of colours



































# TAPIFLEX & ACCZENT EXCELLENCE



Vario - Yellow, Blue, Uni - Medium Grey



## Vario

 Beige	 Light Brown	 Brown	 Light Beige
<ul style="list-style-type: none"> <li> Acoustic: 25015 004</li> <li> Compact: 25027 004</li> <li> Acoustic: 25057 004</li> </ul>	<ul style="list-style-type: none"> <li> Acoustic: 25015 006</li> <li> Compact: 25027 006</li> <li> Acoustic: 25057 006</li> </ul>	<ul style="list-style-type: none"> <li> Acoustic: 25015 003</li> <li> Compact: 25027 003</li> </ul>	<ul style="list-style-type: none"> <li> Acoustic: 25015 008</li> <li> Compact: 25027 008</li> </ul>
 Light Cool Grey	 Cool Grey		
<ul style="list-style-type: none"> <li> Acoustic: 25015 009</li> <li> Compact: 25027 009</li> <li> Acoustic: 25057 009</li> </ul>	<ul style="list-style-type: none"> <li> Acoustic: 25015 005</li> <li> Compact: 25027 005</li> <li> Acoustic: 25057 005</li> </ul>		
 Blue	 Green	 Yellow	 Red
<ul style="list-style-type: none"> <li> Acoustic: 25015 007</li> <li> Compact: 25027 007</li> </ul>	<ul style="list-style-type: none"> <li> Acoustic: 25015 000</li> <li> Compact: 25027 000</li> </ul>	<ul style="list-style-type: none"> <li> Acoustic: 25015 001</li> <li> Compact: 25027 001</li> </ul>	<ul style="list-style-type: none"> <li> Acoustic: 25015 002</li> <li> Compact: 25027 002</li> </ul>

## ACOUSTIC OPTION TAPIFLEX EXCELLENCE

TECHNICAL DATA	STANDARDS	Tapiflex Excellence 65 sheet	Tapiflex Tiles 65
<b>Classification</b>			
Type of Floor Covering	ISO 11638 / EN 651	Heterogeneous Acoustic Vinyl	
Classification	ISO 10874 commercial	Class: 34	
<b>Characteristics</b>			
Total thickness	ISO 24346	3.05mm	3.45mm
Wear layer thickness	ISO 24340	0.65mm	
Total weight	ISO 23997	2 850g/m <sup>2</sup>	3 410g/m <sup>2</sup>
PU treatment	-	TopClean XP™	
Wear layer binder content	ISO 10582	Type I	
<b>Technical performances</b>			
Impact sound reduction	EN ISO 10140-3 EN ISO 717/2	ΔL <sub>w</sub> = 19dB	
Acoustic improvement	NF S31-074	L <sub>n,r,w</sub> < 65dB Class A	
Residual indentation	Average measured value	0.10mm	0.12mm
	ISO 24343-1 requirement	≤ 0.20mm	
	Best measured value(*)	0.08mm	0.10mm
Reaction to fire	EN 13501-1	B <sub>s</sub> s1 on fibrecement substrate A2 <sub>s</sub> C <sub>s</sub> on woodchip substrate ≥ 19 mm	B <sub>s</sub> s1 on fibrecement substrate A2 <sub>s</sub> C <sub>s</sub> on woodchip substrate ≥ 19 mm
Slip resistance	DIN 51130 EN 13893	R9 μ ≥ 0.30	
Dimensional stability	ISO 23999	≤ 0.10%	
Furniture leg	EN 424	No damage	
Castor wheel test	ISO 4918	No damage	
Curl resultant to heat	ISO 23999	≤ 8mm	≤ 2mm
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 <sup>9</sup> ohms	
Chemical resistance	ISO 26987	High resistance	
Hygiene	-	Does not contribute to infection spreading	
Thermal resistance Underfloor heating	EN ISO 10456	0.04m <sup>2</sup> K/W Suitable	
Light fastness	EN ISO 105-B02	≥ 6	≥ 6/8

(\*) for information - not binding

## COMPACT OPTION ACCZENT EXCELLENCE

TECHNICAL DATA	STANDARDS	Accent Excellence 80
<b>Classification</b>		
Type of Floor Covering	ISO 10582	Heterogeneous Compact Vinyl
Classification	ISO 10874 commercial industrial	Classes: 34 43
<b>Characteristics</b>		
Total thickness	ISO 24346	2.00mm
Wear layer thickness	ISO 24340	0.80mm
Total weight	ISO 23997	3 100g/m <sup>2</sup>
PU treatment	-	TopClean XP™
Wear layer binder content	ISO 10582	Type I
<b>Technical performances</b>		
Residual indentation	Average measured value ISO 24343-1 requirement	0.03mm ≤ 0.10mm
Reaction to fire	EN 13501-1	B <sub>s</sub> s1 on fibrecement substrate A2 <sub>s</sub> B <sub>s</sub> s1 on woodchip substrate ≥ 19 mm
Slip resistance	DIN 51130 EN 13893	R9 μ ≥ 0.30
Dimensional stability	ISO 23999	≤ 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918	No damage
Curl resultant to heat	ISO 23999	≤ 8mm
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 <sup>9</sup> ohms
Chemical resistance	ISO 26987	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.02m <sup>2</sup> K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6

The above information is subject to modifications for the benefit of further improvement (07/2016). For more detailed technical information, please contact Tarkett.

## TAPIFLEX & ACCZENT EXCELLENCE

### Vario

#### Main Product Features

- Vintage carpet style ideal for offices and age care applications
- All decors available in compact & acoustic 19dB
- Tiles format available\*\*
- Excellent resistance with TopClean XP™ surface treatment

#### Surface Treatment



#### Sustainability Tag

##### Tapiflex Excellence 65

100% Recyclable Recycled content 21%  
 PHTHALATE FREE Technology  
 Optimal Indoor Air Quality < 10 µg/m<sup>3</sup>  
 Restart Ready  
 \*except recycled content  
 \*TVOC AT 28 DAYS

##### Tapiflex Tiles 65


100% Recyclable Recycled content 28%  
 PHTHALATE FREE Technology  
 Optimal Indoor Air Quality < 10 µg/m<sup>3</sup>  
 Restart Ready  
 \*except recycled content  
 \*TVOC AT 28 DAYS

##### Acczent Excellence 80


100% Recyclable Recycled content 33%  
 PHTHALATE FREE Technology  
 Optimal Indoor Air Quality < 10 µg/m<sup>3</sup>  
 Restart Ready  
 \*except recycled content  
 \*TVOC AT 28 DAYS

#### Logistics Information

Available in rolls  
Rolls length: 231m

Laying direction: 

Available in tiles

Laying direction: 

#### General Information

**Tapiflex Excellence 65 Sheet**  
 0120-05600P-2014-05  
 http://professionals.tarkett.com  
 Manufactured by: Tarkett SAS  
 08200 Sedan - FRANCE  
 According to European Classification ISO 10874 (EN 685)

**Tapiflex Tiles 65**  
 0120-06000P-2014-05  
 http://professionals.tarkett.com  
 Manufactured by: Tarkett SAS  
 08200 Sedan - FRANCE  
 According to European Classification ISO 10874 (EN 685)

**Acczent Excellence 80**  
 0120-06400P-2013-04  
 http://professionals.tarkett.com  
 Manufactured by: Tarkett SAS  
 08200 Sedan - FRANCE  
 According to European Classification ISO 10874 (EN 685)

\*\* available on a selection of colours

# TAPIFLEX & ACCZENT EXCELLENCE



Kraft - Light Purple

## Kraft

Icons:

Beige Acoustic: 25014 008 Compact: 25026 008	Light Beige Acoustic: 25014 009 Compact: 25026 009	Warm Grey Acoustic: 25014 010 Compact: 25026 010	Cool Grey Acoustic: 25014 013 Compact: 25026 013	Dark Warm Grey Acoustic: 25014 011 Compact: 25026 011
Dark Cool Grey Acoustic: 25014 007 Compact: 25026 007	Dark Purple Acoustic: 25014 021 Compact: 25026 021	Blue Acoustic: 25014 019 Compact: 25026 019	Light Blue Acoustic: 25014 020 Compact: 25026 020	
Blue Green Acoustic: 25014 015 Compact: 25026 015	Yellow Green Acoustic: 25014 005 Compact: 25026 005	Yellow Beige Acoustic: 25014 016 Compact: 25026 016	Yellow Acoustic: 25014 006 Compact: 25026 006	Orange Acoustic: 25014 014 Compact: 25026 014
Cardinal Red Acoustic: 25014 012 Compact: 25026 012	Medium Purple Acoustic: 25014 018 Compact: 25026 018	Red Acoustic: 25014 004 Compact: 25026 004	Light Purple Acoustic: 25014 017 Compact: 25026 017	

## ACOUSTIC OPTION TAPIFLEX EXCELLENCE

TECHNICAL DATA	STANDARDS	Tapiflex Excellence 65 sheet
<b>Classification</b>		
Type of Floor Covering	ISO 11638 / EN 651	Heterogeneous Acoustic Vinyl
Classification	ISO 10874 commercial	Class: 34
<b>Characteristics</b>		
Total thickness	ISO 24346	3.05mm
Wear layer thickness	ISO 24340	0.65mm
Total weight	ISO 23997	2 850g/m <sup>2</sup>
PU treatment	-	TopClean XP™
Wear layer binder content	ISO 10582	Type I
<b>Technical performances</b>		
Impact sound reduction	EN ISO 10140-3 EN ISO 717/2	$\Delta L_w = 19dB$
Acoustic improvement	NF S31-074	$L_{n,w} < 65dB$ Class A
Residual indentation	Average measured value	0.10mm
	ISO 24343-1 requirement	$\leq 0.20mm$
	Best measured value(*)	0.08mm
Reaction to fire	EN 13501-1	B <sub>s</sub> s1 on fibrement substrate A2 <sub>n</sub> C <sub>s</sub> on woodchip substrate $\geq 19$ mm
Slip resistance	DIN 51130 EN 13893	R9 $\mu \geq 0.30$
Dimensional stability	ISO 23999	$\leq 0.10\%$
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918	No damage
Curl resultant to heat	ISO 23999	$\leq 8mm$
Electrostatic properties	EN 1815 EN 1081	$\leq 2kV$ on concrete $R1 > 10^9$ ohms
Chemical resistance	ISO 26987	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.04m <sup>2</sup> K/W Suitable
Light fastness	EN ISO 105-B02	$\geq 6$

(\*) for information – not binding

## COMPACT OPTION ACCZENT EXCELLENCE

TECHNICAL DATA	STANDARDS	Accent Excellence 80
<b>Classification</b>		
Type of Floor Covering	ISO 10582	Heterogeneous Compact Vinyl
Classification	ISO 10874 commercial industrial	Classes: 34 43
<b>Characteristics</b>		
Total thickness	ISO 24346	2.00mm
Wear layer thickness	ISO 24340	0.80mm
Total weight	ISO 23997	3 100g/m <sup>2</sup>
PU treatment	-	TopClean XP™
Wear layer binder content	ISO 10582	Type I
<b>Technical performances</b>		
Residual indentation	Average measured value	0.03mm
	ISO 24343-1 requirement	$\leq 0.10mm$
Reaction to fire	EN 13501-1	B <sub>s</sub> s1 on fibrement substrate A2 <sub>n</sub> B <sub>s</sub> s1 on woodchip substrate $\geq 19$ mm
Slip resistance	DIN 51130 EN 13893	R9 $\mu \geq 0.30$
Dimensional stability	ISO 23999	$\leq 0.10\%$
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918	No damage
Curl resultant to heat	ISO 23999	$\leq 8mm$
Electrostatic properties	EN 1815 EN 1081	$\leq 2kV$ on concrete $R1 > 10^9$ ohms
Chemical resistance	ISO 26987	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.02m <sup>2</sup> K/W Suitable
Light fastness	EN ISO 105-B02	$\geq 6$

The above information is subject to modifications for the benefit of further improvement (07/2016). For more detailed technical information, please contact Tarkett.

## TAPIFLEX & ACCZENT EXCELLENCE

### Kraft

#### Main Product Features

- All decors available in compact & acoustic 19dB
- Widest range of colours with 18 different shades
- Excellent resistance with TopClean XP™ surface treatment

#### Surface Treatment



#### Sustainability Tag

##### Tapiflex Excellence 65



##### Acczent Excellence 80



#### Logistics Information

Available in rolls  
Rolls length: 231m

Laying direction:

#### General Information




# TAPIFLEX & ACCZENT EXCELLENCE




Memo - Black, Sketch - Grey



## Sketch

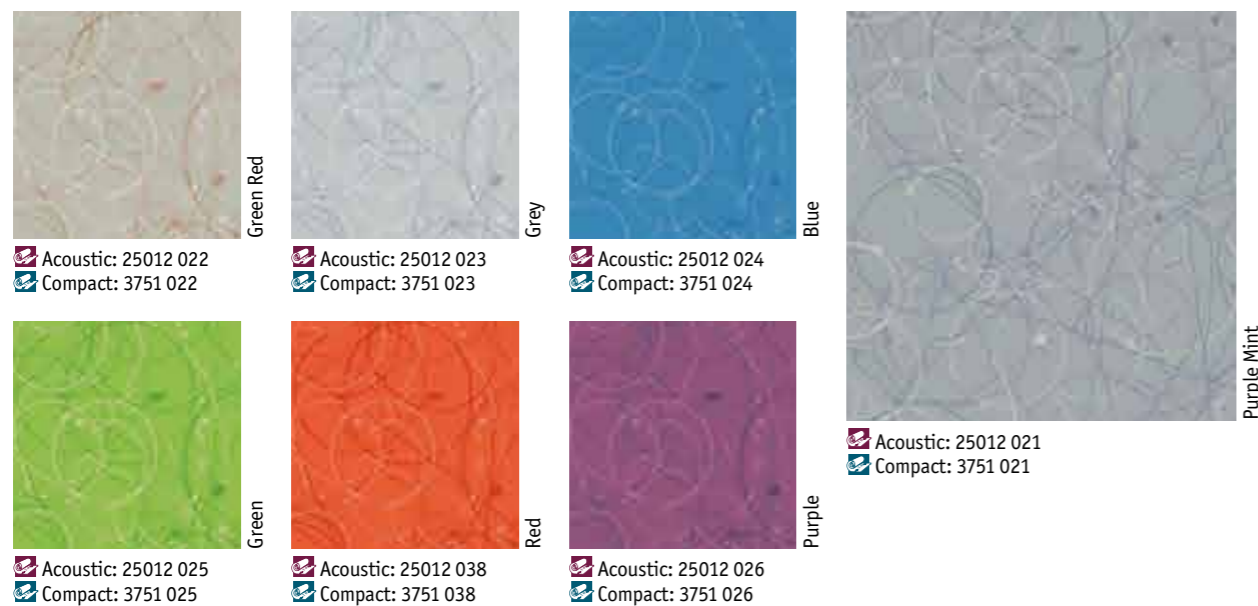

## Memo

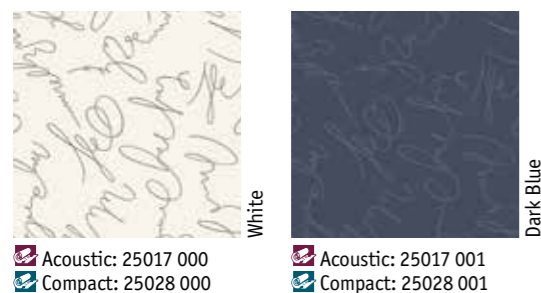

## ACOUSTIC OPTION TAPIFLEX EXCELLENCE

TECHNICAL DATA	STANDARDS	Tapiflex Excellence 65 sheet
<b>Classification</b>		
Type of Floor Covering	ISO 11638 / EN 651	Heterogeneous Acoustic Vinyl
Classification	ISO 10874 commercial	Class: 34
<b>Characteristics</b>		
Total thickness	ISO 24346	3.05mm
Wear layer thickness	ISO 24340	0.65mm
Total weight	ISO 23997	2 850g/m <sup>2</sup>
PU treatment	-	TopClean XP™
Wear layer binder content	ISO 10582	Type I
<b>Technical performances</b>		
Impact sound reduction	EN ISO 10140-3 EN ISO 717/2	$\Delta L_w = 19\text{dB}$
Acoustic improvement	NF S31-074	$L_{n,w} < 65\text{dB Class A}$
Residual indentation	Average measured value	0.10mm
	ISO 24343-1 requirement	$\leq 0.20\text{mm}$
	Best measured value(*)	0.08mm
Reaction to fire	EN 13501-1	B <sub>s</sub> s1 on fibrecement substrate A2 <sub>n</sub> C <sub>s</sub> on woodchip substrate $\geq 19\text{mm}$
Slip resistance	DIN 51130 EN 13893	R9 $\mu \geq 0.30$
Dimensional stability	ISO 23999	$\leq 0.10\%$
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918	No damage
Curl resultant to heat	ISO 23999	$\leq 8\text{mm}$
Electrostatic properties	EN 1815 EN 1081	$\leq 2\text{kV}$ on concrete $R1 > 10^9$ ohms
Chemical resistance	ISO 26987	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.04m <sup>2</sup> K/W Suitable
Light fastness	EN ISO 105-B02	$\geq 6$

(\*) for information - not binding

## COMPACT OPTION ACCZENT EXCELLENCE

TECHNICAL DATA	STANDARDS	Accent Excellence 80
<b>Classification</b>		
Type of Floor Covering	ISO 10582	Heterogeneous Compact Vinyl
Classification	ISO 10874 commercial industrial	Classes: 34 43
<b>Characteristics</b>		
Total thickness	ISO 24346	2.00mm
Wear layer thickness	ISO 24340	0.80mm
Total weight	ISO 23997	3 100g/m <sup>2</sup>
PU treatment	-	TopClean XP™
Wear layer binder content	ISO 10582	Type I
<b>Technical performances</b>		
Residual indentation	Average measured value	0.03mm
	ISO 24343-1 requirement	$\leq 0.10\text{mm}$
Reaction to fire	EN 13501-1	B <sub>s</sub> s1 on fibrecement substrate A2 <sub>n</sub> B <sub>s</sub> s1 on woodchip substrate $\geq 19\text{mm}$
Slip resistance	DIN 51130 EN 13893	R9 $\mu \geq 0.30$
Dimensional stability	ISO 23999	$\leq 0.10\%$
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918	No damage
Curl resultant to heat	ISO 23999	$\leq 8\text{mm}$
Electrostatic properties	EN 1815 EN 1081	$\leq 2\text{kV}$ on concrete $R1 > 10^9$ ohms
Chemical resistance	ISO 26987	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.02m <sup>2</sup> K/W Suitable
Light fastness	EN ISO 105-B02	$\geq 6$

The above information is subject to modifications for the benefit of further improvement (07/2016). For more detailed technical information, please contact Tarkett.

# TAPIFLEX & ACCZENT EXCELLENCE

## Sketch / Memo

### Main Product Features

- Colours fully adapted to Education facilities
- All decors available in compact & acoustic 19dB
- Excellent resistance with TopClean XP™ surface treatment
- Full solution coordinated with wall and wetroom offers

### Surface Treatment



### Sustainability Tag

#### Tapiflex Excellence 65



#### Accent Excellence 80



### Logistics Information



### General Information
















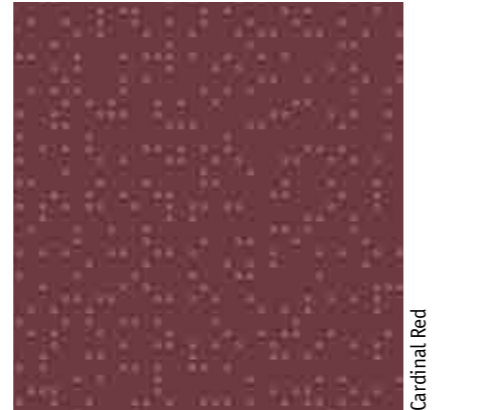



# TAPIFLEX & ACCZENT EXCELLENCE



Matrix - Medium Blue, Uni - Medium Blue



## Matrix<sup>2</sup>

 Very Light Beige Acoustic: 25012 028 Compact: 3751 028	 Dark Beige Acoustic: 25012 027 Compact: 3751 027	 Phospho Acoustic: 25013 101 Compact: 25032 101	 Dark Grey Acoustic: 25012 135 Compact: 3751 019	 Graphite Acoustic: 25012 000 Compact: 3751 000
 Night Blue Acoustic: 25012 037 Compact: 3751 037	 Marin Blue Acoustic: 25012 036 Compact: 3751 036	 Medium Blue Acoustic: 25012 034 Compact: 3751 034	 Mint Acoustic: 25012 033 Compact: 3751 033	 Aubergine Acoustic: 25012 031 Compact: 3751 031
 Green Acoustic: 25012 032 Compact: 3751 032	 Grass Green Acoustic: 25012 035 Compact: 3751 035	 Lemon Yellow Acoustic: 25012 030 Compact: 3751 030	 Cardinal Red Acoustic: 25012 003 Compact: 3751 003	
 Orange Red Acoustic: 25012 029 Compact: 3751 029	 Red Acoustic: 25012 148 Compact: 3751 148	 Rosa Acoustic: 25012 006 Compact: 3751 006		

## ACOUSTIC OPTION TAPIFLEX EXCELLENCE

TECHNICAL DATA	STANDARDS	Tapiflex Excellence 65 sheet
<b>Classification</b>		
Type of Floor Covering	ISO 11638 / EN 651	Heterogeneous Acoustic Vinyl
Classification	ISO 10874 commercial	Class: 34
<b>Characteristics</b>		
Total thickness	ISO 24346	3.05mm
Wear layer thickness	ISO 24340	0.65mm
Total weight	ISO 23997	2 850g/m <sup>2</sup>
PU treatment	-	TopClean XP™
Wear layer binder content	ISO 10582	Type I
<b>Technical performances</b>		
Impact sound reduction	EN ISO 717/2	$\Delta L_w = 19\text{dB}$
Acoustic improvement	NF S31-074	$L_{n,w} < 65\text{dB}$ Class A
Residual indentation	Average measured value	0.10mm
	ISO 24343-1 requirement	$\leq 0.20\text{mm}$
	Best measured value(*)	0.08mm
Reaction to fire	EN 13501-1	B <sub>s1</sub> s1 on fibrement substrate A2 <sub>n</sub> C <sub>s</sub> on woodchip substrate $\geq 19\text{mm}$
Slip resistance	DIN 51130 EN 13893	R9 $\mu \geq 0.30$
Dimensional stability	ISO 23999	$\leq 0.10\%$
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918	No damage
Curl resultant to heat	ISO 23999	$\leq 8\text{mm}$
Electrostatic properties	EN 1815 EN 1081	$\leq 2\text{kV}$ on concrete $R1 > 10^9$ ohms
Chemical resistance	ISO 26987	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.04m <sup>2</sup> K/W Suitable
Light fastness	EN ISO 105-B02	$\geq 6$

(\*) for information – not binding

## COMPACT OPTION ACCZENT EXCELLENCE

TECHNICAL DATA	STANDARDS	Accent Excellence 80
<b>Classification</b>		
Type of Floor Covering	ISO 10582	Heterogeneous Compact Vinyl
Classification	ISO 10874 commercial industrial	Classes: 34 43
<b>Characteristics</b>		
Total thickness	ISO 24346	2.00mm
Wear layer thickness	ISO 24340	0.80mm
Total weight	ISO 23997	3 100g/m <sup>2</sup>
PU treatment	-	TopClean XP™
Wear layer binder content	ISO 10582	Type I
<b>Technical performances</b>		
Residual indentation	Average measured value	0.03mm
	ISO 24343-1 requirement	$\leq 0.10\text{mm}$
Reaction to fire	EN 13501-1	B <sub>s1</sub> s1 on fibrement substrate A2 <sub>n</sub> B <sub>s1</sub> s1 on woodchip substrate $\geq 19\text{mm}$
Slip resistance	DIN 51130 EN 13893	R9 $\mu \geq 0.30$
Dimensional stability	ISO 23999	$\leq 0.10\%$
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918	No damage
Curl resultant to heat	ISO 23999	$\leq 8\text{mm}$
Electrostatic properties	EN 1815 EN 1081	$\leq 2\text{kV}$ on concrete $R1 > 10^9$ ohms
Chemical resistance	ISO 26987	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.02m <sup>2</sup> K/W Suitable
Light fastness	EN ISO 105-B02	$\geq 6$

The above information is subject to modifications for the benefit of further improvement (07/2016). For more detailed technical information, please contact Tarkett.

## TAPIFLEX & ACCZENT EXCELLENCE Matrix<sup>2</sup>

### Main Product Features

- All decors available in compact & acoustic 19dB
- Matching Uni colours for ideal combination
- Excellent resistance with TopClean XP™ surface treatment
- Full solution coordinated with wall and wetroom offers

### Surface Treatment



### Sustainability Tag

**Tapiflex Excellence 65**


- 100% Recyclable Recycled content (21%)
- PHthalate FREE Technology
- Optimal Indoor Air Quality (<10 µg/m<sup>3</sup>)
- Restart Ready

**Acczent Excellence 80**

- 100% Recyclable Recycled content (33%)
- PHthalate FREE Technology
- Optimal Indoor Air Quality (<10 µg/m<sup>3</sup>)
- Restart Ready

### Logistics Information

Available in rolls  
Rolls length: 231m

Laying direction: 

### General Information

**Tapiflex Excellence 65 Sheet**  
0120-05600P-2014-05  
http://professionals.tarkett.com  
Manufactured by Tarkett SAS  
08200 Sedan - FRANCE  
EN 14041:2004  
According to European Classification ISO 10874 (EN 685)

**Acczent Excellence 80**  
0120-05600P-2013-04  
http://professionals.tarkett.com  
Manufactured by Tarkett SAS  
08200 Sedan - FRANCE  
EN 14041:2004  
According to European Classification ISO 10874 (EN 685)



# TAPIFLEX & ACCZENT EXCELLENCE



Uni - Aubergine, Sketch - Purple Mint



## Uni

Very Light Beige	Dark Beige	Medium Grey	Warm Grey	Dark Grey
Acoustic: 25016 007 Compact: 4601 007	Acoustic: 25016 018 Compact: 4601 018	Acoustic: 25016 017 Compact: 4601 017	Acoustic: 25016 025 Compact: 4601 025	Acoustic: 25016 016 Compact: 4601 016
Mint	Medium Blue	Dark Blue	Night Blue	
Acoustic: 25016 003 Compact: 4601 003	Acoustic: 25016 001 Compact: 4601 001	Acoustic: 25016 029 Compact: 4601 029	Acoustic: 25016 008 Compact: 4601 008	
Green	Grass Green	Lemon Yellow		
Acoustic: 25016 002 Compact: 4601 002	Acoustic: 25016 009 Compact: 4601 009	Acoustic: 25016 019 Compact: 4601 019		
Orange Red	Dark Red	Pink	Aubergine	Cardinal Red
Acoustic: 25016 000 Compact: 4601 000	Acoustic: 25016 010 Compact: 4601 010	Acoustic: 25016 014 Compact: 4601 014	Acoustic: 25016 004 Compact: 4601 004	Acoustic: 25016 015 Compact: 4601 015

## ACOUSTIC OPTION TAPIFLEX EXCELLENCE

TECHNICAL DATA	STANDARDS	Tapiflex Excellence 65 sheet
<b>Classification</b>		
Type of Floor Covering	ISO 11638 / EN 651	Heterogeneous Acoustic Vinyl
Classification	ISO 10874 commercial	Class: 34
<b>Characteristics</b>		
Total thickness	ISO 24346	3.05mm
Wear layer thickness	ISO 24340	0.65mm
Total weight	ISO 23997	2 850g/m <sup>2</sup>
PU treatment	-	TopClean XP™
Wear layer binder content	ISO 10582	Type I
<b>Technical performances</b>		
Impact sound reduction	EN ISO 717/2	$\Delta L_w = 19\text{dB}$
Acoustic improvement	NF S31-074	$L_{n,e,w} < 65\text{dB Class A}$
Residual indentation	Average measured value	0.10mm
	ISO 24343-1 requirement	$\leq 0.20\text{mm}$
Best measured value(*)		0.08mm
Reaction to fire	EN 13501-1	B <sub>s</sub> s1 on fibrement substrate A2 <sub>n</sub> C <sub>s</sub> on woodchip substrate $\geq 19\text{ mm}$
Slip resistance	DIN 51130 EN 13893	R9 $\mu \geq 0.30$
Dimensional stability	ISO 23999	$\leq 0.10\%$
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918	No damage
Curl resultant to heat	ISO 23999	$\leq 8\text{mm}$
Electrostatic properties	EN 1815 EN 1081	$\leq 2\text{kV}$ on concrete $R1 > 10^9$ ohms
Chemical resistance	ISO 26987	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.04m <sup>2</sup> K/W Suitable
Light fastness	EN ISO 105-B02	$\geq 6$

(\*) for information – not binding

## COMPACT OPTION ACCZENT EXCELLENCE

TECHNICAL DATA	STANDARDS	Accent Excellence 80
<b>Classification</b>		
Type of Floor Covering	ISO 10582	Heterogeneous Compact Vinyl
Classification	ISO 10874 commercial industrial	Classes: 34 43
<b>Characteristics</b>		
Total thickness	ISO 24346	2.00mm
Wear layer thickness	ISO 24340	0.80mm
Total weight	ISO 23997	3 100g/m <sup>2</sup>
PU treatment	-	TopClean XP™
Wear layer binder content	ISO 10582	Type I
<b>Technical performances</b>		
Residual indentation	Average measured value	0.03mm
	ISO 24343-1 requirement	$\leq 0.10\text{mm}$
Reaction to fire	EN 13501-1	B <sub>s</sub> s1 on fibrement substrate A2 <sub>n</sub> B <sub>s</sub> s1 on woodchip substrate $\geq 19\text{ mm}$
Slip resistance	DIN 51130 EN 13893	R9 $\mu \geq 0.30$
Dimensional stability	ISO 23999	$\leq 0.10\%$
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918	No damage
Curl resultant to heat	ISO 23999	$\leq 3\text{mm}$
Electrostatic properties	EN 1815 EN 1081	$\leq 2\text{kV}$ on concrete $R1 > 10^9$ ohms
Chemical resistance	ISO 26987	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.02m <sup>2</sup> K/W Suitable
Light fastness	EN ISO 105-B02	$\geq 6$

The above information is subject to modifications for the benefit of further improvement (07/2016). For more detailed technical information, please contact Tarkett.

## TAPIFLEX & ACCZENT EXCELLENCE

### Unis

#### Main Product Features

- All decors available in compact & acoustic 19dB
- Matching Matrix<sup>2</sup> colours for ideal combination
- Excellent resistance with TopClean XP™ surface treatment
- Full solution coordinated with wall and wetroom offers

#### Surface Treatment



#### Sustainability Tag

**Tapiflex Excellence 65**

- 100% Recyclable Recycled content (21%)
- PHthalate FREE Technology
- Optimal Indoor Air Quality (<10 µg/m<sup>3</sup>)
- Restart Ready

**Acczent Excellence 80**

- 100% Recyclable Recycled content (33%)
- PHthalate FREE Technology
- Optimal Indoor Air Quality (<10 µg/m<sup>3</sup>)
- Restart Ready

#### Logistics Information

Available in rolls  
Rolls length: 231m

Laying direction:

#### General Information

**Tapiflex Excellence 65 Sheet**  
0120-05600P-2014-05  
http://professionals.tarkett.com  
Manufactured by Tarkett SAS  
08200 Sedan - FRANCE  
According to European Classification ISO 10874 (EN 685)

**Acczent Excellence 80**  
0120-05600P-2013-04  
http://professionals.tarkett.com  
Manufactured by Tarkett SAS  
08200 Sedan - FRANCE  
According to European Classification ISO 10874 (EN 685)