

ACCZENT EXCELLENCE 70



ACCZENT EXCELLENCE 70

TECHNICAL DATA	STANDARDS	Accent Excellence 70 Topaz	Accent Excellence 70 Silver	Accent Excellence 70 Ruby	Accent Excellence 70 Opal
Classification					
Type of floor covering	ISO 10582	Heterogeneous Compact Vinyl			
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 34 43	Classes: 34 43	Classes: 34 43	Classes: 34 43
Characteristics					
Total thickness	ISO 24346 (EN 428)	2.50mm	2.00mm	2.00mm	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	0.70mm	0.70mm	0.70mm	0.70mm
Total weight	ISO 23997 (EN 430)	2 900g/m ²	2 360g/m ²	3 000g/m ²	3 000g/m ²
PU treatment	-	TopClean™	TopClean™	TopClean™	TopClean™
Wear layer binder content	ISO 10582	Type I			
Technical performances					
Residual indentation	Average measured value	≤ 0.10mm			
	ISO 24343-1 (EN 433) requirement				
Reaction to fire	EN 13501-1	C ₁ -s1 glued on any derivative wood panel C ₁ -s1 loose-laid on any derivative wood panel	B ₁ S1 glued over any A2 ₁ or A1 ₁ substrate (concrete) and over any derivative wood substrate		
Slip resistance	DIN 51130 EN 13893	R10 μ ≥ 0.30	R10 μ ≥ 0.30	R10 μ ≥ 0.30	R9 μ ≥ 0.30
Dimensional stability	ISO 23999 (EN 434)	≤ 0.10%			
Furniture leg	EN 424	No damage			
Castor wheel test	ISO 4918 (EN 425)	No damage			
Curl resultant to heat	ISO 23999 (EN 434)	≤ 8mm			
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 ⁹ ohms			
Chemical resistance	ISO 26987 (EN 423)	High resistance			
Hygiene	-	Does not contribute to infection spreading			
Thermal resistance Underfloor heating	EN ISO 10456	0.02m ² K/W Suitable			
Light fastness	EN ISO 105-B02	≥ 6			
Impact sound reduction	Standards EN ISO 10140-3 EN ISO 717/2	13dB	10dB	-	
Form of delivery	EN 24341 (EN 426)	approx. 24lm x 2/3/4m	approx. 25lm x 2/3/4m	approx. 23lm x 2/4m	
Colours		Clic: 13 Wood: 11	8	Nature: 23 Wood: 13	Clic: 13 Wood: 4

VINYL
HEAVY TRAFFIC

ACCZENT EXCELLENCE 70

Budget solution with premium qualities for heavy traffic areas

SENSORIAL BENEFITS


- Mix of mineral design effects and wood design
- A large choice of printed and inlaid designs

FUNCTIONAL BENEFITS

- 4 sub-collections to better answer your needs
- Resistant floor to indentation & abrasion
- Low cost and easy maintenance with TopClean


ENVIRONMENTAL BENEFITS

- Sainer atmosphere

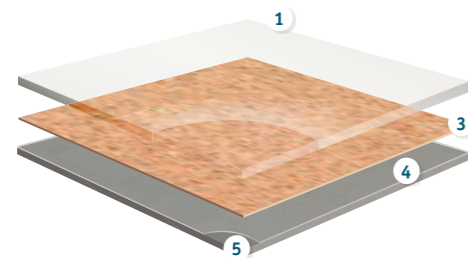

ACCZENT EXCELLENCE 70 RUBY & OPAL

- 1 Easy maintenance and very high resistance to scratches: TopClean™ PUR reinforcement treatment
- 2 Resistance to abrasion: 0.70mm pure PVC transparent wear layer
- 3 High definition print
- 4 Superior dimensional stability (≤ 0.10%): Glass fibre non-woven reinforcement
- 5 Resistance to indentation and tearing: Solid homogeneous calendered sheet made of recycled vinyl
- 6 PVC Backing

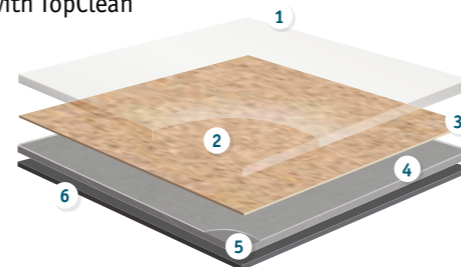

ACCZENT EXCELLENCE 70 TOPAZ & SILVER

The above information is subject to modifications for the benefit of further improvement (07/2016). For more detailed technical information, please contact Tarkett.



Download the product offer

















































ACCZENT EXCELLENCE 70 TOPAZ



Clic - Beige






Clic

 Black	 Beige	 Red	 Carbon	 Grey
 5626 015  5625 015  5624 015	 5626 016  5625 016  5624 016	 5626 017  5625 017  5624 017	 5626 019  5625 019  5624 019	 5626 020  5625 020  5624 020
 Grege	 Brown	 White	 Blue	
 5626 021  5625 021  5624 021	 5626 022  5625 022  5624 022	 5626 023  5625 023  5624 023	 5626 024  5625 024  5624 024	
 Light Brown	 Yellow	 Green		
 5626 034  5625 034  5624 034	 5626 035  5625 035  5624 035	 5626 036  5625 036  5624 036		

TECHNICAL DATA	STANDARDS	Accent Excellence 70 Topaz
Classification		
Type of floor covering	ISO 10582	Heterogeneous Compact Vinyl
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.50mm
Wear layer thickness	ISO 24340 (EN 429)	0.70mm
Total weight	ISO 23997 (EN 430)	2 900g/m ²
PU treatment	-	TopClean™
Wear layer binder content	ISO 10582	Type I
Technical performances		
Residual indentation	Average measured value	≤ 0.10mm
	ISO 24343-1 (EN 433) requirement	
Reaction to fire	EN 13501-1	C _{fl} -s1 glued on any derivative wood panel C _{fl} -s1 loose-laid on any derivative wood panel
Slip resistance	DIN 51130 EN 13893	R10 μ ≥ 0.30
Dimensional stability	ISO 23999 (EN 434)	≤ 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	ISO 23999 (EN 434)	≤ 8mm
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 ⁹ ohms
Chemical resistance	ISO 26987 (EN 423)	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.02m ² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6
Impact sound reduction	Standards EN ISO 10140-3 EN ISO 717/2	13dB

The above information is subject to modifications for the benefit of further improvement (07/2016). For more detailed technical information, please contact Tarkett.



 5626 018
 5625 018
 5624 018

ACCZENT EXCELLENCE 70 TOPAZ Clic

Main Product Features

- Warmth and comfort
- Very comfortable flooring with 13dB acoustic
- 2.5mm total thickness
- Available in 2, 3 and 4 meter widths

Surface Treatment



Sustainability Tag



Logistics Information



Laying direction:



General Information



According to European Classification ISO 10874 (EN 685)

ACCZENT EXCELLENCE 70 TOPAZ



Antik Oak - Light Brown


Soft Elm



Brown

- 5626 001
- 5625 001
- 5624 001

Antik Oak




Natural

- 5626 028
- 5625 028
- 5624 028



Light Natural

- 5626 027
- 5625 027
- 5624 027



Light Brown

- 5626 005
- 5625 005
- 5624 005



White

- 5626 026
- 5625 026
- 5624 026

Arcadia



Light Yellow

- 5626 032
- 5625 032
- 5624 032



Brown Natural

- 5626 030
- 5625 030
- 5624 030



Light Grege


- 5626 031
- 5625 031
- 5624 031

Beech



Beige Yellow

- 5626 025
- 5625 025
- 5624 025



Light Natural

- 5626 006
- 5625 006
- 5624 006



TECHNICAL DATA	STANDARDS	Accent Excellence 70 Topaz
Classification		
Type of floor covering	ISO 10582	Heterogeneous Compact Vinyl
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.50mm
Wear layer thickness	ISO 24340 (EN 429)	0.70mm
Total weight	ISO 23997 (EN 430)	2 900g/m ²
PU treatment	-	TopClean™
Wear layer binder content	ISO 10582	Type I
Technical performances		
Residual indentation	Average measured value	≤ 0.10mm
	ISO 24343-1 (EN 433) requirement	
Reaction to fire	EN 13501-1	C _{fl} -s1 glued on any derivative wood panel C _{fl} -s1 loose-laid on any derivative wood panel
Slip resistance	DIN 51130 EN 13893	R10 μ ≥ 0.30
Dimensional stability	ISO 23999 (EN 434)	≤ 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	ISO 23999 (EN 434)	≤ 8mm
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 ⁹ ohms
Chemical resistance	ISO 26987 (EN 423)	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.02m ² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6
Impact sound reduction	Standards EN ISO 10140-3 EN ISO 717/2	13dB

The above information is subject to modifications for the benefit of further improvement (07/2016).
For more detailed technical information, please contact Tarkett.



Middle Natural

- 5626 029
- 5625 029
- 5624 029

ACCZENT EXCELLENCE 70 TOPAZ Wood

Main Product Features

- Warmth and comfort
- Very comfortable flooring with 13dB acoustic
- 2.5mm total thickness
- Available in 2, 3 and 4 meter widths


Surface Treatment



Sustainability Tag



Logistics Information



General Information




According to European Classification ISO 10874 (EN 685)

ACCZENT EXCELLENCE 70 SILVER




Silver - Metal Blue

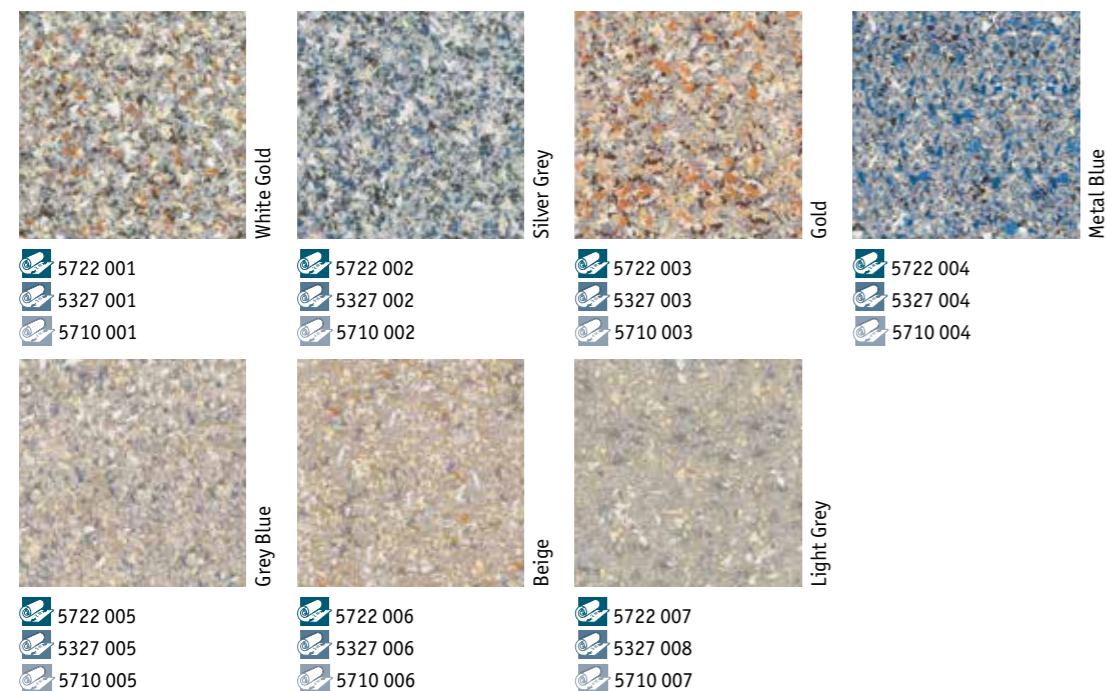

TECHNICAL DATA	STANDARDS	Accent Excellence 70 Silver
Classification		
Type of floor covering	ISO 10582	Heterogeneous Compact Vinyl
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	0.70mm
Total weight	ISO 23997 (EN 430)	2 360g/m ²
PU treatment	-	TopClean™
Wear layer binder content	ISO 10582	Type I
Technical performances		
Residual indentation	Average measured value	≤ 0.10mm
	ISO 24343-1 (EN 433) requirement	
Reaction to fire	EN 13501-1	B _s S ₁ glued over any A ₂ _s or A ₁ _s substrate (concrete) and over any derivative wood substrate
Slip resistance	DIN 51130 EN 13893	R10 μ ≥ 0.30
Dimensional stability	ISO 23999 (EN 434)	≤ 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	ISO 23999 (EN 434)	≤ 8mm
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 ⁹ ohms
Chemical resistance	ISO 26987 (EN 423)	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.02m ² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6
Impact sound reduction	Standards EN ISO 10140-3 EN ISO 717/2	10dB

The above information is subject to modifications for the benefit of further improvement (07/2016). For more detailed technical information, please contact Tarkett.

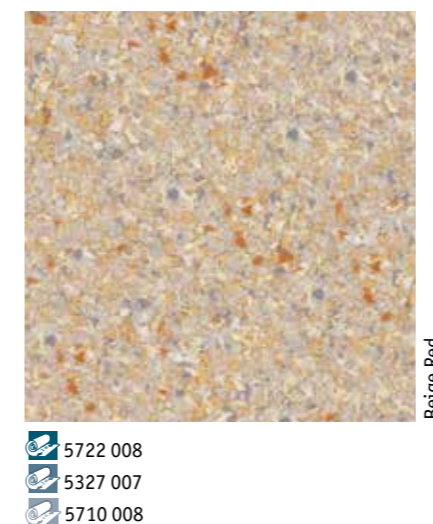

ACCZENT EXCELLENCE 70 SILVER

Main Product Features

- Comfort and a safety touch
- Comfortable floor with 10dB acoustic
- Superior anti slip resistance (R10)
- Available in 2, 3 and 4 meter widths
- Inlaid designs


Surface Treatment



Sustainability Tag



Logistics Information



General Information




ACCZENT EXCELLENCE 70 RUBY



Nature - 3755 063




Nature

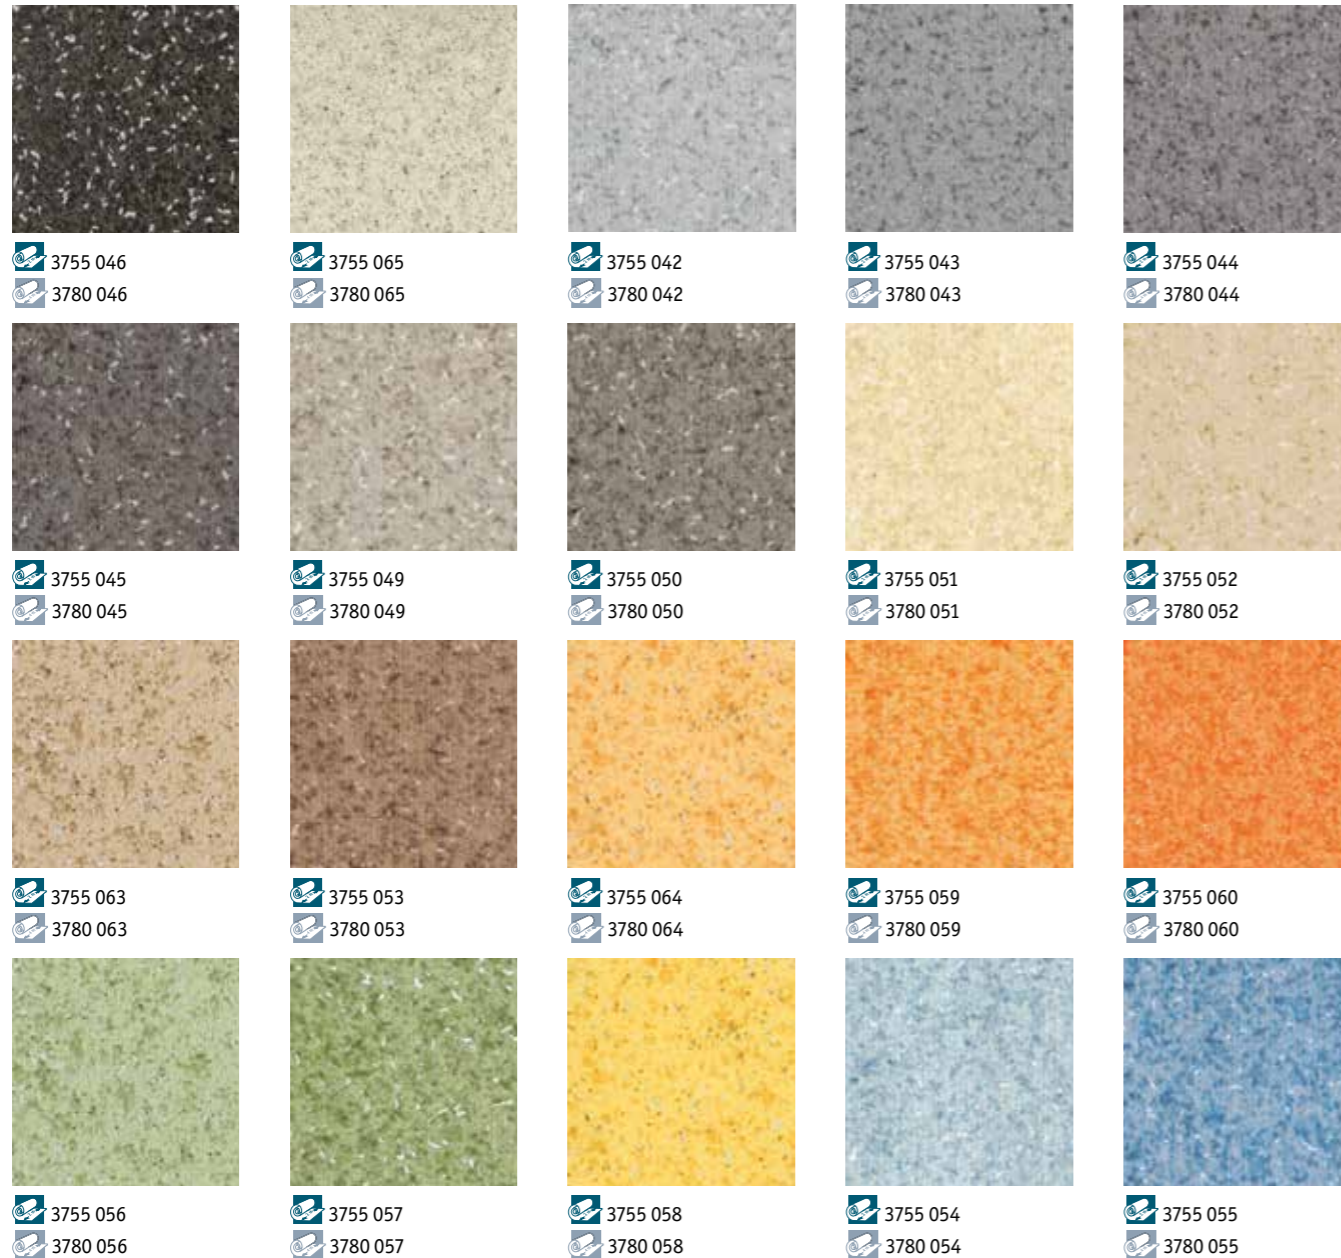

TECHNICAL DATA	STANDARDS	Accent Excellence 70 Ruby
Classification		
Type of floor covering	ISO 10582	Heterogeneous Compact Vinyl
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	0.70mm
Total weight	ISO 23997 (EN 430)	3 000g/m ²
PU treatment	-	TopClean™
Wear layer binder content	ISO 10582	Type I
Technical performances		
Residual indentation	Average measured value	≤ 0.10mm
	ISO 24343-1 (EN 433) requirement	
Reaction to fire	EN 13501-1	B ₁ S ₁ glued over any A ₂ _n or A ₁ _n substrate (concrete) and over any derivative wood substrate
Slip resistance	DIN 51130 EN 13893	R10 μ ≥ 0.30
Dimensional stability	ISO 23999 (EN 434)	≤ 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	ISO 23999 (EN 434)	≤ 8mm
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 ⁹ ohms
Chemical resistance	ISO 26987 (EN 423)	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.02m ² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6

The above information is subject to modifications for the benefit of further improvement (07/2016). For more detailed technical information, please contact Tarkett.

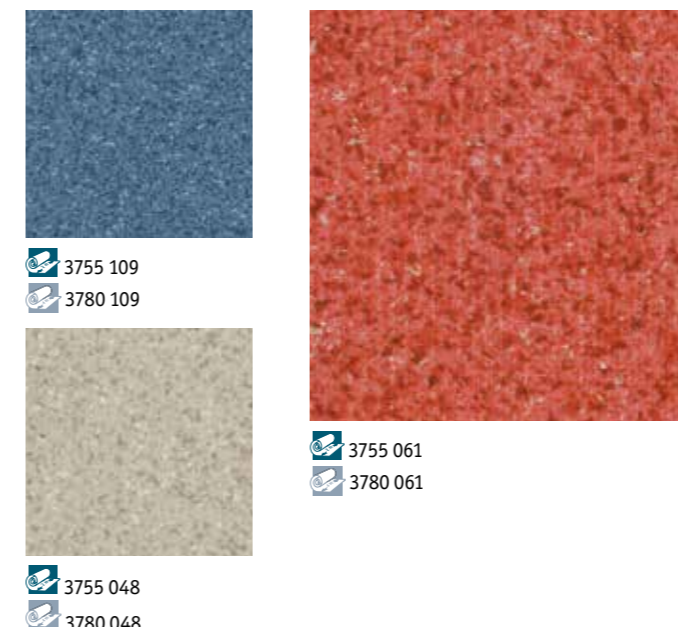

ACCZENT EXCELLENCE 70 RUBY Nature

Main Product Features

- Resistance and a safety touch
- Excellent resistance to indentation and abrasion
- Superior anti slip resistance (R10)
- Available in 2 and 4 meter widths


Surface Treatment



Sustainability Tag



Logistics Information



General Information



ACCZENT EXCELLENCE 70 RUBY



Faro 2 - Natural



Beech Fayard



Light Natural

3755 029
3780 029

Beech



Natural

3755 030
3780 030

Trend Oak



White Beige

3755 031
3780 031

Faro 2



Natural Brown


3755 032
3780 032



Natural

3755 034
3780 034

Oak



Grey Beige

3755 035
3780 035

Antik Oak



Grey

3755 036
3780 036

Domigo



Natural Grey

3755 037
3780 037

Sherwood



Light

3755 038
3780 038

Walnut



Flat Brown

3755 039
3780 039

Maple



Dark

3755 040
3780 040



Red

3755 041
3780 041

TECHNICAL DATA	STANDARDS	Accent Excellence 70 Ruby
Classification		
Type of floor covering	ISO 10582	Heterogeneous Compact Vinyl
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	0.70mm
Total weight	ISO 23997 (EN 430)	3 000g/m ²
PU treatment	-	TopClean™
Wear layer binder content	ISO 10582	Type I
Technical performances		
Residual indentation	Average measured value	≤ 0.10mm
	ISO 24343-1 (EN 433) requirement	
Reaction to fire	EN 13501-1	B _n S ₁ glued over any A2 _n or A1 _n substrate (concrete) and over any derivative wood substrate
Slip resistance	DIN 51130 EN 13893	R10 μ ≥ 0.30
Dimensional stability	ISO 23999 (EN 434)	≤ 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	ISO 23999 (EN 434)	≤ 8mm
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 ⁹ ohms
Chemical resistance	ISO 26987 (EN 423)	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.02m ² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6

The above information is subject to modifications for the benefit of further improvement (07/2016). For more detailed technical information, please contact Tarkett.

ACCZENT EXCELLENCE 70 RUBY Wood

Main Product Features

- Resistance and a safety touch
- Excellent resistance to indentation and abrasion
- Superior anti slip resistance (R10)
- Available in 2 and 4 meter widths

Surface Treatment



Sustainability Tag



Logistics Information



Available in rolls:
2m & 4m
Rolls length: 231m

Laying direction:



Wood

General Information



According to European Classification ISO 10874 (EN 685)

ACCZENT EXCELLENCE 70 OPAL




Clic - 3810 027



Clic



3810 035
3811 035




3810 033
3811 033




3810 030
3811 030




3810 027
3811 027




3810 036
3811 036




3810 037
3811 037




3810 029
3811 029



3810 028
3811 028



3810 025
3811 025



3810 032
3811 032



3810 031
3811 031



3810 034
3811 034

Wood



Natural

3810 024
3811 024



Natural beige

3810 021
3811 021



Natural

3810 022
3811 022



Natural dark

3810 020
3811 020

TECHNICAL DATA	STANDARDS	Accent Excellence 70 Opal
Classification		
Type of floor covering	ISO 10582	Heterogeneous Compact Vinyl
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	0.70mm
Total weight	ISO 23997 (EN 430)	3 000g/m ²
PU treatment	-	TopClean™
Wear layer binder content	ISO 10582	Type I
Technical performances		
Residual indentation	Average measured value	≤ 0.10mm
	ISO 24343-1 (EN 433) requirement	
Reaction to fire	EN 13501-1	B ₁ S ₁ glued over any A ₂ _n or A ₁ _n substrate (concrete) and over any derivative wood substrate
Slip resistance	DIN 51130 EN 13893	R9 μ ≥ 0.30
Dimensional stability	ISO 23999 (EN 434)	≤ 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	ISO 23999 (EN 434)	≤ 8mm
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 ⁹ ohms
Chemical resistance	ISO 26987 (EN 423)	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.02m ² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6

The above information is subject to modifications for the benefit of further improvement (07/2016). For more detailed technical information, please contact Tarkett.



3810 026
3811 026

ACCZENT EXCELLENCE 70 OPAL Clic / Wood

Main Product Features

- Colours combinations between all-over designs and uni shades
- Available in 2 and 4 meter widths

Surface Treatment



Sustainability Tag




Logistics Information



Available in rolls:
2m & 4m
Rolls length: 231m

Laying direction:



General Information



According to European Classification ISO 10874 (EN 685)