


The Primo Premium range

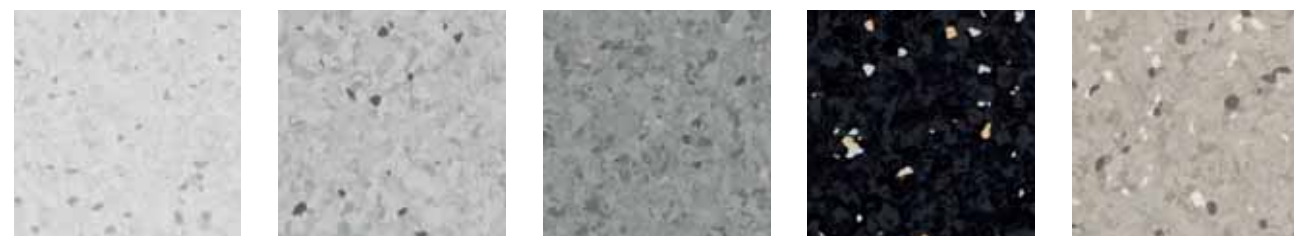


3128 651
3129 651

3128 652
3129 652

3128 653
3129 653

3128 654

3128 655

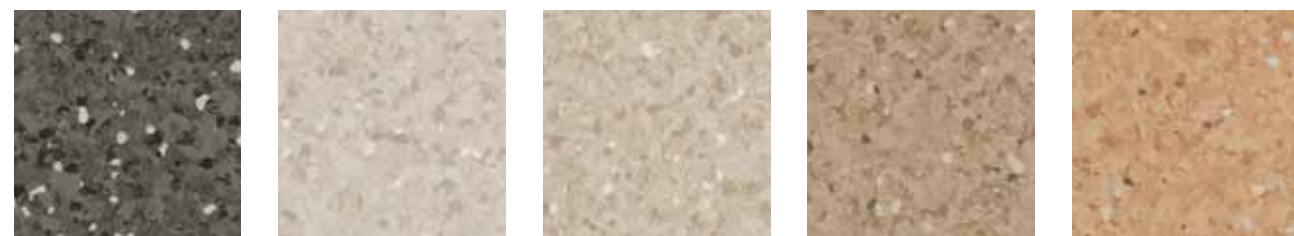

3128 656

3128 657
3129 657

3128 658

3128 659

3128 660
3129 660




3128 661

3128 662

3128 663
3129 663

3128 664

3128 665
3129 665



Rolls: 16 colours
Tiles: 8 colours

3128 666
3129 666

There may be variations in colour between printed samples and delivered goods.

Colours for creating harmony

The Primo Premium range includes 16 base colours, with two contrasting particles (accent colour chips) integrated in each one. This design concept allows the possibility of using only one colour or several in combination – as the accent colours are either one of the other base colours or the same accent as in another base colour – when creating stylish and harmonious interior designs.



Primo Premium

DESCRIPTION

Primo Premium is homogeneous, high-quality vinyl flooring suitable for most types of premises such as schools, health care facilities and other types of public buildings. Primo Premium needs no additional surface treatment such as polish or wax when exposed to normal wear and tear. This will have a beneficiary effect on the life cycle cost. The Primo Premium range includes 16 base colours, with two contrasting accent colour chips. This design concept allows endless combination possibilities.

Technical data	Primo Premium	
Type of flooring	EN 649	Homogeneous vinyl flooring
CE certification		Yes
Classification	EN 685	Commercial: 34 Industrial: 43
Wear layer thickness	EN 429	2,0 mm
Surface treatment		PUR treatment
Total thickness	EN 428	2,0 mm
Total weight/m ²	EN 430	3150 g
Dimensional stability	EN 434	≤ 0,40%
Abrasion		
Thickness loss	EN 660: Part 1	Group P: ≤ 0,15 mm
Volume loss	EN 660: Part 2	Group P: ≤ 4,00 mm ³
Residual indentation	EN 433	Approx. 0,06 mm
Castor chair test	EN 425	Suitable
Static electrical charge	EN 1815	< 2 kV
Underfloor heating		Suitable – max. 27° C
Flexibility	EN 435	OK
Impact sound resistance	EN ISO 717/2	Approx. + 4 dB
Thermal resistance	DIN 52612	Approx. 0,01 m ² K/W
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	Class B _s s1 ≥ 8 kW/m ² Pass
Light fastness	EN ISO 105-B02	≥ level 6
Chemical resistance	EN 423	Good resistance
Slip resistance	DIN 51130	R9
	EN 13893	≥ 0,3
Colours	16 (8 colours available in tiles)	
Form of delivery	EN 426 Sheet (rolls)	Approx. 23 r m x 200 cm art. no. 3128_ _ _ 3 digit colour number
	EN 427 Tiles (box)	61 x 61 cm 14 tiles / box = 5,21 m ² art. no. 3129_ _ _ 3 digit colour number

The above information is subject to modification for the benefit of further improvement (03/07).

For more detailed technical information, please contact Tarkett.
Please follow Tarkett's installation and maintenance instructions, included on the packaging, carefully.

NCS CODES AND WELDING RODS		
Colour N°	NCS number	Welding rod N°
651	S 1000-N	1287 338
652	S 2500-N	1291 811
653	S 3502-B	1292 383
654	S 8502-B	1287 340
655	S 3005-Y20R	1287 012
656	S 6502-Y	1287 333
657	S 2005-Y50R	1292 319
658	S 2005-Y40R	1291 821
659	S 3010-Y30R	1287 292
660	S 3020-Y30R	1287 339
661	S 1020-Y30R	1288 348
662	S 4030-Y50R	1287 336
663	S 3020-G40Y	1287 332
664	S 4010-G50Y	1287 330
665	S 3030-R90B	1288 334
666	S 4040-R90B	1287 335



www.tarkett-commercial.com

TARKETT SALES COMPANIES

> **Australia:** Tarkett Australia Pty Ltd – Tel. +61 2 96 34 73 73 > **Austria:** Tarkett Holding GmbH, Niederlassung Wien – Tel. +43 1 47 88 062 > **Baltic States:** Tarkett SAS - Tel. +370 37 262 220 > **Belgium:** S.A. Tarkett NV – Tel. +32 2 520 04 67 > **China:** Tarkett Asia Pacific Limited Shanghai Representative Office – Tel. +86 (21) 62 88 15 38 > **Czech Republic:** Tarkett SAS, org. slozka – Tel. +420-271 001 602 > **Denmark:** Tarkett A/S – Tel. +45 43 90 60 11 > **Finland:** Tarkett Oy – Tel. +358 9 5406 5870 > **France:** Tarkett SAS – Tel. +33 1 41 20 42 49 > **Germany:** Tarkett Holding GmbH, Bereich Objekt – Tel. +49 6233 810 > **Greece:** Tarkett Monoprosopi Ltd – Tel. +30 2 10 576 3889 > **Hong Kong:** Tarkett Asia Pacific Ltd. – Tel. +852 2511 8716 > **Hungary:** Tarkett SAS – Tel. +36 1 437-8150 > **Italy:** Tarkett S.p.A. – Tel. +39 02 893 411 > **Luxembourg:** Tel. +352 949 211 8804 > **Middle East:** Tarkett Middle East – Tel. +961 1 75 2363/4 > **Netherlands:** Tarkett Benelux B.V. – Tel. +31 76 57 80 760 > **Norway:** Tarkett AS – Tel. +47 32 20 92 00 > **Poland:** Tarkett Komfort Sp. z o.o. – Tel. +48 22 639 31 66 > **Portugal:** Tarkett SA – Tel. +351 21 427 64 20 > **Russian Federation:** Tarkett Russia – Tel. +7 4 95 777 69 83 > **Slovakia:** Tarkett SAS – Tel. +421 37 6515 404 > **Singapore:** Tarkett Far East – Tel. +65 67 43 53 84 > **South East Europe:** Tarkett Trade d.o.o. – Tel. +381 21 7557 649 • (44) 569 12 21 > **Spain:** Tarkett Floors S.L. – Tel. +34 91 358 00 35 > **Sweden:** Tarkett Sverige AB – Tel. +46 771 25 19 00 > **Switzerland:** Tarkett Holding GmbH, Bereich Objekt Schweiz – Tel. +41 043 233 79 24 > **Ukraine:** Tarkett UA – Tel. +380380 (44) 569 12 21 > **United Kingdom:** Tarkett-Marley Floors Limited – Tel. +44 (0) 1622 854 040 > **North America:** Johnsonite – Tel. +1 440 543 8916 > **Tarkett Inc. USA:** – Tel. +1 713 869 5811 > **Tarkett International:** Tel. +49 6233 811 755 – Tel. +33 1 41 20 41 01

Primo Premium



HOMOGENEOUS FLOORCOVERING

VINYL



Primo Premium brochure-English-3128350705-11/07-navigator

- > Modern and harmonious colours
- > Accent chips for endless colour combinations
- > PUR reinforced - Easy low cost maintenance
- > No additional surface treatment needed
- > Favourable initial cost





A Primo Premium choice

Primo Premium is a homogeneous, high-quality vinyl flooring suitable for most types of premises such as schools, health care facilities and other types of public buildings. Primo Premium is PUR reinforced and will need no wax and no polish for life. Looking at all the PUR reinforced vinyl floorings in the market Primo Premium is a very good choice due to its high-quality properties and competitive price. Primo Premium is as close as it gets to the outstanding range of iQ floorings from Tarkett.

PUR reinforced for an excellent life cycle cost

With Primo Premium you get a hardwearing vinyl flooring with a modern design, balanced raw material content and good maintenance properties. Primo Premium needs no additional surface treatment such as polish or wax when exposed to normal wear and tear. This will have a beneficiary effect on the life cycle cost.

Maintenance costs are crucial

Calculations show that the initial cost of buying and

installing a flooring is about 8% of the total cost over the flooring's at least 20-year service life. That means cleaning and maintenance represent as much as 92% of the total cost. Although cleaning and maintenance costs are the largest items of expenditure in property management, and therefore very important for overall economy, they are often overlooked in initial budgets. Analysing and providing the best conditions for the efficient care and maintenance of floors pays dividends. Choosing the right flooring, with the right cleaning properties, is therefore crucial for obtaining a good life cycle cost.

What pays in the long term?

A complete analysis of the total life cycle cost for different vinyl floorings shows that a low-price floor covering, which requires regular treatment with polish, proves to be the most expensive choice over time. Primo Premium from Tarkett offers a perfect compromise if you have a limited initial budget and still want a PUR reinforced, high-quality function and an excellent life cycle cost.



Tarkett Environmental Intelligence

We see our Intelligent Flooring Solutions as part of the world's ecological system – and make strong efforts to secure that all our activities are based on respect for the environment. All our flooring products are developed, produced and handled with a great concern for sustainability and environment. We call it Environmental Intelligence and live by this principle in every single step, from vision to waste.



Environmental Intelligence in our vinyl flooring

Tarkett introduced the first vinyl flooring more than 60 years ago, and environmental sustainability has always been in focus for us.

- 100% recyclable
- Low energy consumption
- Easy and lowest maintenance cost ever
- Low emissions
- Long life cycle avoiding short-term replacement and minimizing old installation waste